



KOMPATTO 5030

The Kompatto 5030 Komplet tracked mounted screener is a self-propelled screening of compact size. It is easy to use and was designed to perform every kind of site work, its lightweight makes it easy to transport, load and unload. The Kompatto 5030 model is perfect for intense daily screening activities and can function both as a tilted screen featuring two meshes for three selections, or as a prescreening machine to be used on the crushing operations output. In order to fulfil this purpose, it was designed to be used either with regular steel mesh screens or with heavy duty reinforced screening bars. The tracked Kompatto 5030 model, just like all Komplet machines, easily fit inside a container and can be shipped worldwide with ease.

- 1. SCREENBOX
- 2. FEEDER
- 3. FINESIZE SIDE CONVEYOR
- 4. MIDSIZE SIDE CONVEYOR
- 5. OVERSIZE FRONT CONVEYOR
- 6. POWERUNIT
- 7. CONTROL SYSTEM
- 8. TRACKS CHASSIS



TECHNICAL DATA

Length 8.2 ft

Width

VIBRATING LOADING HOPPER

Grid Dimensions 8.2 ft x 3.2 ft

Screening Grid N°02

2.6 ft **Hopper Capacity** 2,5 m³

Loading Height 8.5 ft

FEDDING BELT FINE MATERIAL BELT

Length 20 ft

Width 1.9 ft

Pile height 9.1 ft

OVERSIZE MATERIAL BELT

Length 12.1 ft

Width 2.6 ft

Pile height

2° Pile height 8 ft

ENGINE ISUZU

Power 32/43,5 kW/Hp

Consumption 8,5 L/h

CRAWLED TRACK WITH PADS

Length 9 ft

Width 1.3 ft

PERFORMANCE

Production 50-350 T/h

Max size 23.6 in

Standard weight 26,455 lbs



STANDARD MACHINE

- Remote control for undercarriage movements.
- Screening grid a bars.

ACCESSORIES

- Remote control for all movements.
- Dust dumping system.
- Screening grid made in metal sheet.
- Screening grid made metallic net.


DIMENSION TRANSPORT


Length 9860 mm Width 2250 mm Height 2500 mm






TRANSPORT DIMENSION & WORKING DIMENSION

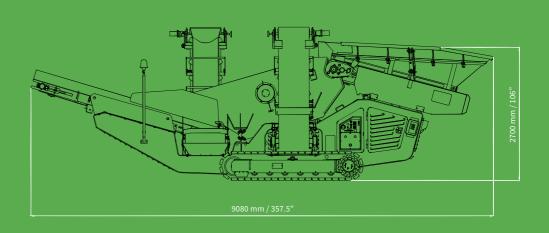

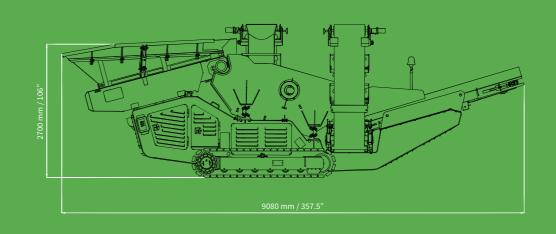

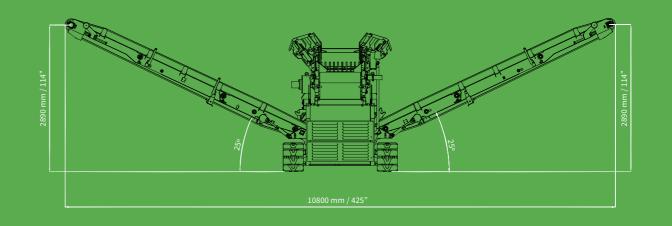

6

