

K-TS 40

TROMMEL SCREENER



K-TS 40



1. 3,000x1,300 mm
118x51 inch
2. 3,900x1,300 mm
119x51 inch



3 to 60 mm
0,1 to 2,3 inch



Genset 45 kW
50 Hz
380 V



Up to 100 mch



10,000 kg
22,046 lb


The K-TS 40 builds on the performance of the K-TS series, offering increased screening capacity while maintaining efficiency and mobility. Like the K-TS 30, it delivers three material fractions—fines, mids, and overs—making it ideal for high-volume screening applications.

A fully electric drive system minimizes energy usage and reduces wear on components, lowering service and operating costs over time. With advanced functionality and robust construction, the K-TS 40 is designed for operators who need higher throughput without compromising efficiency, reliability, or ease of operation.

FEATURES AND BENEFITS

- Heavy duty incline trommel screen with adjustable speed
- Power options: diesel-electric or all electric option
- Single or double trommel with same machine
- Quick change mesh
- Easy access to platform
- Hydraulically folding conveyors
- Variable feeder speed
- Cleaning brush
- Intuitive automation & control system

WORKING

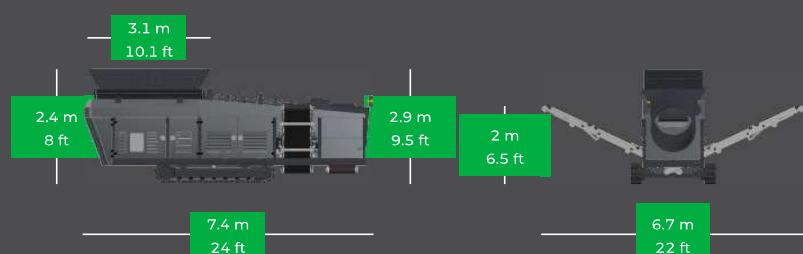

- Wireless remote control
- Quick set-up time typically under 15 minutes